

Extended Temperature MSA Compatible Full Function Booster EDFA



Optical Characteristics

Parameter	Condition	Specification			
		Min.	Typ.	Max.	
Operating Wavelength Range	nm	1528	-	1562	
Input Optical Power (P _{in})	dBm	- 10	-	+ 4	
Total Output Power	P _{in} = -6dBm	+ 13	-	-	
		+ 15	-	-	
		+ 17	-	-	
Noise Figure	dB	P _{in} = -6dBm, P _{out} = 13 ~ 17dBm	-	5.0	6.0
		P _{in} = +4dBm, P _{out} = 13dBm	-	7.0	8.0
		P _{in} = +4dBm, P _{out} = 15dBm	-	6.5	7.5
		P _{in} = +4dBm, P _{out} = 17dBm	-	6.0	7.0
Polarization Dependent Gain	dB	-	-	0.5	
Polarization Mode Dispersion	ps	-	-	0.5	
Return Loss	dB	Pump LD off	35		
Operating Temperature	°C		- 40	75	
Fiber Type	-	SMF-28, 900µm loose tube			
Dimensions	mm	70 x 90 x 15			

Unless otherwise noted, specifications listed in this section are guaranteed under single channel operation over operating wavelength range and operating temperature range and without connectors.

Electrical Characteristics

Parameter	Unit	Min.	Typ.	Max.
Input Monitor Accuracy	dB	- 0.5	-	+ 0.5
Output Monitor Accuracy for APC and ACC	dB	- 0.5	-	+ 0.5
Output Monitor Accuracy for AGC	dB	- 0.65	-	+ 0.65
Power Supply Voltage	V	4.75	5.00	5.25
Power Consumption (cooled)	W	-	3	8
Cold Start Settle Time	s	-	-	10
Warm Start Settle Time	s	-	-	0.1
Transient Settle Time *	µs	-	150	250
AGC Excursion *	dB	-	0.5	0.8
Transient Gain Steady State Error *	dB	-	0.5	0.8

Note * for AGC mode only and in the condition of 6dB Add/Drop.

Fireware Function, Monitors and Alarms

Parameter	Specification
Firmware Functions	• Field upgradable
	• Automatic Gain Control (AGC) mode
	• Automatic Output Power Control (APC) mode
	• Automatic Pump Current Control (ACC) mode
	• Reset
	• Disable
	• Mute
Monitors	• Total input optical power
	• Total output optical power
	• Pump status
	• Module temperature
Alarms	• Loss of signal alarm
	• Loss of output power alarm
	• Module temperature alarm
	• Pump temperature alarm
	• Pump bias current alarm

Features/Benefits

- Firmware field upgradable
- Multiple control modes (AGC, APC and ACC)
- Comprehensive reporting
- Digital interface with RS-232
- Low Noise Figure (NF)
- Optimized as a booster

Applications

- Single-channel or narrow-band amplification
- Metropolitan and access networks
- Amplifier for long haul networks
- Optical cross-connect
- Switch matrix
- Optical add/drop module
- Amplifier for transmitter modules
- Power equalization and pre-emphasis
- Digital CATV

Full Function Pin Assignment

Pin	Function	Pin	Function
1	+ 5.0V	2	+ 5.0V
3	NC	4	NC
5	GND	6	GND
7	RS-232 Rx	8	RS-232 Tx
9	GND	10	GND
11	NC	12	RESET input, (active low)
13	Amplifier disable input, (active high)	14	Output power mute input,(active high)
15	Case temperature alarm, (active high)	16	Common alarm, (active low)
17	Pump temperature alarm, (active high)	18	Pump bias alarm, (active high)
19	Loss of input alarm, (active high)	20	Loss of output alarm, (active high)
21	Input power monitor ground	22	Output power monitor ground
23	Input power monitor	24	Output power monitor
25	GND	26	GND
27	NC	28	NC
29	+ 5.0V	30	+ 5.0V


Electrical connection is made via a female 30 PIN connector (2 rows of 15, pin pitch 2.0mm, 0.5x0.5mm), Samtec SMM-115-01-S-D or equivalent. Note: Logic level: "H" 2.0~5.3V and "L" 0.0~0.8V.

Safety Information

ESD Protection


The laser diodes and photodiodes in the module can be easily destroyed by electrostatic discharge. Use wrist straps, grounded work surfaces, and anti-static techniques when operating this module. When not in use, the module shall be kept in a static-free environment.

Dimensions

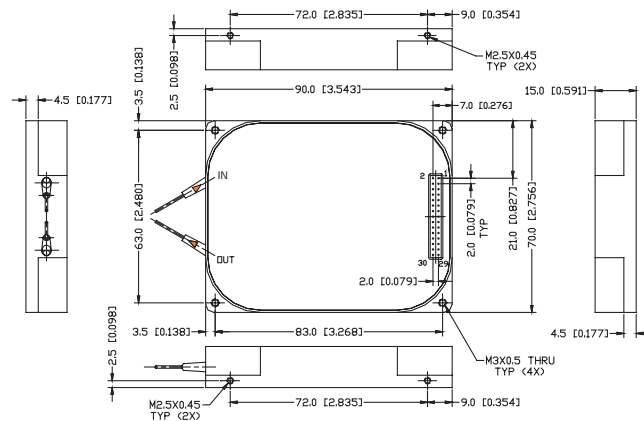

Unit: mm (inch)

Ordering Information

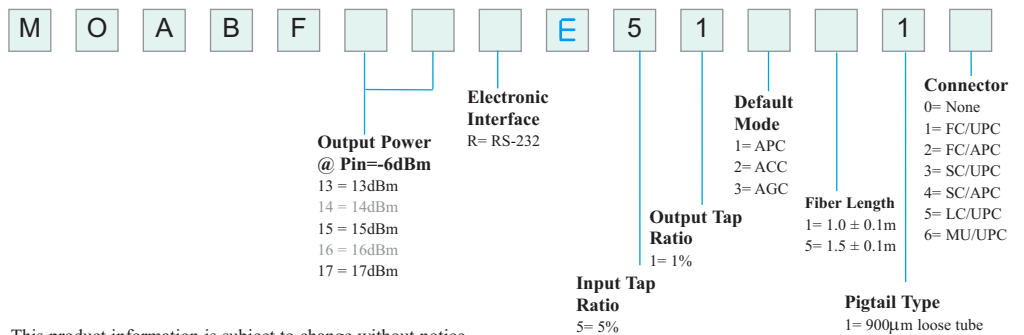

This product information is subject to change without notice.